

Fall arresters

retractable type

CR 200 steel cable retractor

EN 360



- Ref.: CR 200 06 - cable length 6m
 Ref.: CR 200 10 - cable length 10m
 Ref.: CR 200 12 - cable length 12m
 Ref.: CR 200 15 - cable length 15m
 Dimensions: 208 x 85 x 280 mm
 Weight:
 CR 200 06 - weight 5,10kg
 CR 200 10 - weight 5,30kg
 CR 200 12 - weight 5,90kg
 CR 200 15 - weight 6,10kg



SWIVEL SNAP HOOKS



AZ 030
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g



AZ 031T
aluminium,
galvanized steel
opening: 23 mm
twist lock
weight: 200 g



AZ 050
galvanized steel
opening: 23 mm
weight: 360 g



AZ 051T
galvanized steel
opening: 23 mm
weight: 360 g



AXK 10S
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g



AZ 005
galvanized steel
opening: 18 mm
weight: 380 g



AZ 060
galvanized steel
opening: 21 mm
weight: 380 g

SWIVEL SNAP HOOKS WITH FALL INDICATOR

AZ 030I
with indicator
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g



AZ 031TI
with indicator
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g

AXK 10SI
with indicator
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g



AZ 060I
with indicator
galvanized steel
opening: 21 mm
weight: 380 g



Fall arresters

retractable type

**IN SALE
FROM
APRIL 2006**

WR 200 WEBBING RETRACTOR

EN 360



Ref.: WR 200 06 - webbing length 6m
 Dimensions: 208 x 85 x 280 mm
 Weight: 4,80kg



SWIVEL SNAP HOOKS



AZ 030
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g



AZ 031T
aluminium,
galvanized steel
opening: 23 mm
twist lock
weight: 200 g



AZ 050
galvanized steel
opening: 23 mm
weight: 360 g



AZ 051T
galvanized steel
opening: 23 mm
weight: 360 g



AXK 10S
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g



AZ 005
galvanized steel
opening: 18 mm
weight: 380 g



AZ 060
galvanized steel
opening: 21 mm
weight: 380 g

SWIVEL SNAP HOOKS WITH FALL INDICATOR

AZ 030I
with indicator
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g



AZ 031TI
with indicator
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g

AXK 10SI
with indicator
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g



AZ 060I
with indicator
galvanized steel
opening: 21 mm
weight: 380 g



Fall arresters

retractable type

**IN SALE
FROM
SEPTEMBER 2006**

CR 300 STEEL CABLE RETRACTOR

EN 360



Ref.: CR 300 20 - cable length 20m - weight 7,50kg
 Ref.: CR 300 25 - cable length 25m - weight 7,90kg
 Ref.: CR 300 30 - cable length 30m - weight 8,30kg
 Dimensions: 260 x 120 x 340 mm



SWIVEL SNAP HOOKS



AZ 030
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g



AZ 031T
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g
twist lock



AZ 050
galvanized steel
opening: 23 mm
weight: 360 g



AZ 051T
galvanized steel
opening: 23 mm
weight: 360 g



AXK 10S
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g



AZ 005
galvanized steel
opening: 18 mm
weight: 380 g



AZ 060
galvanized steel
opening: 21 mm
weight: 380 g

SWIVEL SNAP HOOKS WITH FALL INDICATOR

AZ 030I
with indicator
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g



AZ 031TI
with indicator
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g

AXK 10SI
with indicator
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g



AZ 060I
with indicator
galvanized steel
opening: 21 mm
weight: 380 g



Fall arresters

retractable type


ROLEX WEBBING RETRACTOR

EN 360



Ref.: AH 210

- Dimensions (without webbing and snap hooks)
115 x 80 x 150 mm
- Working length: 2,25m
- weight: 1150g

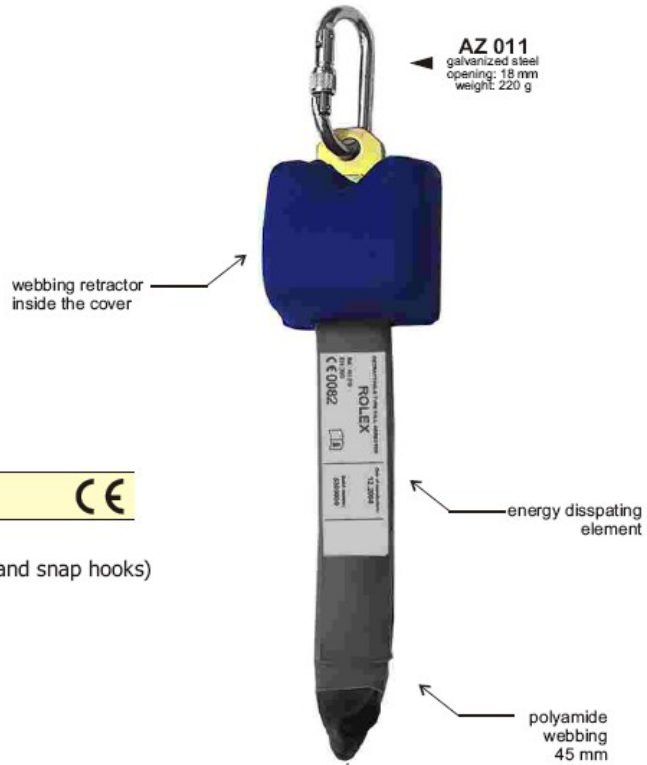

SWIVEL SNAP HOOKS



AZ 030
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g




AZ 031T
aluminium,
galvanized steel
opening: 23 mm
weight: 200 g
twist lock



AXK 10S
aluminium,
galvanized steel
opening: 22 mm
weight: 220 g

Horizontal lifelines

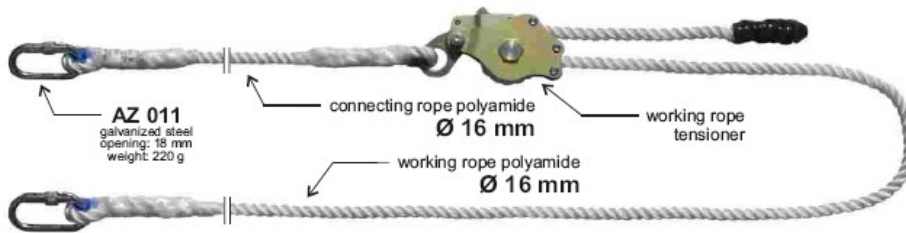

ADJUSTING THE LENGTH AND THE TENSION THE HORIZONTAL LIFE LINE



DISASSEMBLY OF THE HORIZONTAL LIFELINE



AE 300 ADJUSTABLE HORIZONTAL LIFELINE


EN 795



Ref.: AE 300 10 - device length 10 m

Ref.: AE 300 20 - device length 20 m

Other lenghtes on request.

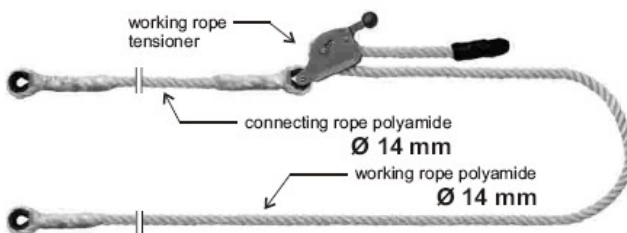

LP 120 ADJUSTABLE HORIZONTAL LIFELINE

EN 795



Ref.:

LP 120 10 - device length 5m

LP 120 20 - device length 10m

LP 120 10 - device length 15m

LP 120 10 - device length 20m

Other lenghtes on request.

ADJUSTING THE LENGTH AND THE TENSION THE HORIZONTAL LIFE LINE



DISASSEMBLY OF THE HORIZONTAL LIFELINE

